

Distributed Modeling in Discrete Time

Julius Smith and Nelson Lee


RealSimple Project*
Center for Computer Research in Music and Acoustics (CCRMA)
Department of Music, Stanford University
Stanford, California 94305

June 5, 2008

Outline

- Ideal Vibrating String
- Finite Difference Approximation (FDA)
- Traveling-Wave Solution
- Ideal Plucked String
- Sampling Issues
- Lossless Digital Waveguides
- Sampled Traveling Waves versus Finite Differences
- Lossy 1D Wave Equation
- Dispersive 1D Wave Equation

Ideal Vibrating String

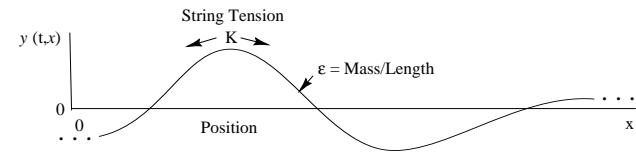

Wave Equation

$$Ky'' = \epsilon \ddot{y}$$

$K \triangleq$	string tension	$y \triangleq$	$y(t, x)$
$\epsilon \triangleq$	linear mass density	$\dot{y} \triangleq$	$\frac{\partial}{\partial t} y(t, x)$
$y \triangleq$	string displacement	$y' \triangleq$	$\frac{\partial}{\partial x} y(t, x)$

Newton's second law

$$\text{Force} = \text{Mass} \times \text{Acceleration}$$

Assumptions

- Lossless
- Linear
- Flexible (no "Stiffness")
- Slope $y'(t, x) \ll 1$

*Work supported by the Wallenberg Global Learning Network

Example One-Dimensional Waveguides

- Any elastic medium displaced along 1D
- Air column of a clarinet or organ pipe
 - Air-pressure deviation $p \leftrightarrow$ string displacement y
 - Longitudinal volume velocity $u \leftrightarrow$ transverse string velocity v
- Vibrating strings
 - Really need at least *three* coupled 1D waveguides:
 - * Horizontally polarized transverse waves
 - * Vertical polarized transverse waves
 - * Longitudinal waves(Typically 1 or 2 WG per string used in practice)
 - Bowed strings also require *torsional waves*
(Typical: one waveguide per string [plane of the bow])
 - Piano requires up to three coupled strings per key
 - * Two-stage decay
 - * Aftersound(Typical: 1 or 2 waveguides per string)

Let's first review the finite difference approximation applied to the ideal string (for comparison purposes):

Finite Difference Approximation (FDA)

$$\dot{y}(t, x) \approx \frac{y(t, x) - y(t - T, x)}{T}$$

and

$$y'(t, x) \approx \frac{y(t, x) - y(t, x - X)}{X}$$

- T = temporal sampling interval
- X = spatial sampling interval
- Exact in limit as sampling intervals \rightarrow zero
- Half a sample delay at each frequency.
Fix: $\dot{y}(t, x) \approx [y(t + T, x) - y(t - T, x)]/(2T)$

Zero-phase second-order difference:

$$\ddot{y}(t, x) \approx \frac{y(t + T, x) - 2y(t, x) + y(t - T, x)}{T^2}$$

$$y''(t, x) \approx \frac{y(t, x + X) - 2y(t, x) + y(t, x - X)}{X^2}$$

- All odd-order derivative approximations suffer a half-sample delay error
- All even order cases can be compensated as above

FDA of 1D Wave Equation

Substituting finite difference approximation (FDA) into the wave equation $Ky'' = \epsilon \ddot{y}$ gives

$$\begin{aligned} & K \frac{y(t, x+X) - 2y(t, x) + y(t, x-X)}{X^2} \\ &= \epsilon \frac{y(t+T, x) - 2y(t, x) + y(t-T, x)}{T^2} \end{aligned}$$

⇒ Time Update:

$$y(t+T, x) = \frac{KT^2}{\epsilon X^2} [y(t, x+X) - 2y(t, x) + y(t, x-X)] + 2y(t, x) - y(t-T, x)$$

Let $c \triangleq \sqrt{K/\epsilon}$ (speed of sound along the string).

In practice, we typically normalize such that

- $T = 1 \Rightarrow t = nT = n$
- $X = cT = 1 \Rightarrow x = mX = m$, and

$$\boxed{y(n+1, m) = y(n, m+1) + y(n, m-1) - y(n-1, m)}$$

- Recursive *difference equation* in two variables (time and space)
- Time-update recursion for time $n+1$ requires *all* values of string displacement (i.e., all m), for the two preceding time steps (times n and $n-1$)

- Recursion typically started by assuming zero past displacement: $y(n, m) = 0, n = -1, 0, \forall m$.
- Higher order wave equations yield more terms of the form $y(n-l, m-k) \Leftrightarrow$ frequency-dependent *losses* and/or *dispersion* characteristics are introduced into the FDA:
- Linear differential equations with constant coefficients give rise to some linear, time-invariant discrete-time system via the FDA

– Linear, time-invariant, “filtered waveguide” case:

$$\boxed{\sum_{k=0}^{\infty} \alpha_k \frac{\partial^k y(t, x)}{\partial t^k} = \sum_{l=0}^{\infty} \beta_l \frac{\partial^l y(t, x)}{\partial x^l}}$$

– More general linear, time-invariant case

$$\sum_{k=0}^{\infty} \sum_{l=0}^{\infty} \alpha_{k,l} \frac{\partial^k \partial^l y(t, x)}{\partial t^k \partial x^l} = \sum_{m=0}^{\infty} \sum_{n=0}^{\infty} \beta_{m,n} \frac{\partial^m \partial^n y(t, x)}{\partial t^m \partial x^n}$$

– Nonlinear example:

$$\frac{\partial y(t, x)}{\partial t} = \left(\frac{\partial y(t, x)}{\partial x} \right)^2$$

– Time-varying example:

$$\frac{\partial y(t, x)}{\partial t} = t^2 \frac{\partial y(t, x)}{\partial x}$$

Traveling-Wave Solution

One-dimensional lossless wave equation:

$$Ky'' = \epsilon \ddot{y}$$

Plug in *traveling wave to the right*:

$$y(t, x) = y_r(t - x/c)$$

$$\Rightarrow y'(t, x) = -\frac{1}{c} \dot{y}(t, x)$$

$$y''(t, x) = \frac{1}{c^2} \ddot{y}(t, x)$$

- Since $c \triangleq \sqrt{K/\epsilon}$, the wave equation is satisfied for *any shape traveling to the right at speed c* (but remember $\text{slope} \ll 1$)
- Similarly, any *left-going* traveling wave at speed c , $y_l(t + x/c)$, satisfies the wave equation

- General solution to lossless, 1D, second-order wave equation:

$$y(t, x) = y_r(t - x/c) + y_l(t + x/c)$$

- $y_l(\cdot)$ and $y_r(\cdot)$ are arbitrary twice-differentiable functions ($\text{slope} \ll 1$)
- **Important point:** Function of two variables $y(t, x)$ is replaced by two functions of a single (time) variable \Rightarrow *reduced complexity*.
- Published by d'Alembert in 1747

Laplace-Domain Analysis

- e^{st} is an *eigenfunction* under differentiation
- Plug it in:

$$y(t, x) = e^{st+vx}$$

- By *differentiation theorem*

$$\begin{aligned} \dot{y} &= sy & y' &= vy \\ \ddot{y} &= s^2y & y'' &= v^2y \end{aligned}$$

- Wave equation becomes

$$\begin{aligned} K v^2 y &= \epsilon s^2 y \\ \implies \frac{s^2}{v^2} &= \frac{K}{\epsilon} = c^2 \\ \implies v &= \pm \frac{s}{c} \end{aligned}$$

Thus

$$y(t, x) = e^{s(t \pm x/c)}$$

is a solution for all s .

Interpretation: left- and right-going exponentially enveloped complex sinusoids

General eigensolution:

$$y(t, x) = e^{s(t \pm x/c)}, \quad s \text{ arbitrary, complex}$$

By *superposition*,

$$y(t, x) = \sum_i A^+(s_i) e^{s_i(t-x/c)} + A^-(s_i) e^{s_i(t+x/c)}$$

is also a solution for all $A^+(s_i)$ and $A^-(s_i)$.


Alternate derivation of D'Alembert's solution:

- Specialize general eigensolution to $s \triangleq j\omega$
- Extend summation to an integral over ω
 \Rightarrow *Inverse Fourier transform* gives

$$y(t, x) = y_r\left(t - \frac{x}{c}\right) + y_l\left(t + \frac{x}{c}\right)$$

where $y_r(\cdot)$ and $y_l(\cdot)$ are arbitrary continuous functions

Infinitely long string plucked simultaneously at three points marked 'p'

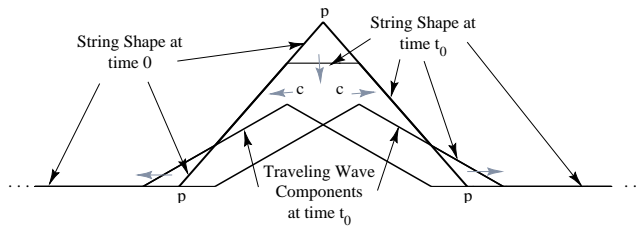

- Initial displacement = sum of two identical triangular pulses
- At time t_0 , traveling waves centers are separated by $2ct_0$ meters
- String is not moving where the traveling waves overlap at same slope.

Sampled Traveling Waves in a String

For discrete-time simulation, we must *sample* the traveling waves

- Sampling interval $\triangleq T$ seconds
- Sampling rate $\triangleq f_s$ Hz = $1/T$
- Spatial sampling rate $\triangleq X$ m/s $\triangleq cT$
 \Rightarrow *systolic grid*

For a vibrating string with length L and fundamental frequency f_0 ,

$$c = f_0 \cdot 2L \quad \left(\frac{\text{periods}}{\text{sec}} \cdot \frac{\text{meters}}{\text{period}} = \frac{\text{meters}}{\text{sec}} \right)$$

so that

$$X = cT = (f_0 2L) / f_s = L[f_0 / (f_s / 2)]$$

Thus, the number of *spatial samples* along the string is

$$L/X = (f_s/2) / f_0$$

or

$$\text{Number of spatial samples} = \text{Number of string harmonics}$$

Examples:

- Spatial sampling interval for (1/2) CD-quality digital model of Les Paul electric guitar (strings \approx 26 inches long)
 - $X = Lf_0/(f_s/2) = L82.4/22050 \approx 2.5$ mm for low E string
 - $X \approx 10$ mm for high E string (two octaves higher and the same length)
 - Low E string: $(f_s/2)/f_0 = 22050/82.4 = 268$ harmonics (spatial samples)
 - High E string: 67 harmonics (spatial samples)
- Number of harmonics = number of oscillators required in *additive synthesis*
- Number of harmonics = number of two-pole filters required in *subtractive, modal, or source-filter decomposition synthesis*

Examples (continued):

- Sound propagation in *air*:
 - Speed of sound $c \approx 331$ meters per second
 - $X = 331/44100 = 7.5$ mm
 - Spatial sampling rate = $\nu_s = 1/X = 133$ samples/m
 - Sound speed in air is *comparable* to that of transverse waves on a guitar string (faster than some strings, slower than others)
 - Sound travels much faster in most solids than in air
 - Longitudinal waves in strings travel faster than transverse waves

Sampled Traveling Waves in any Digital Waveguide

$$\begin{aligned} x &\rightarrow x_m = mX \\ t &\rightarrow t_n = nT \end{aligned}$$

\Rightarrow


$$\begin{aligned} y(t_n, x_m) &= y_r(t_n - x_m/c) + y_l(t_n + x_m/c) \\ &= y_r(nT - mX/c) + y_l(nT + mX/c) \\ &= y_r[(n - m)T] + y_l[(n + m)T] \\ &= y^+(n - m) + y^-(n + m) \end{aligned}$$

where we defined

$$y^+(n) \triangleq y_r(nT) \quad y^-(n) \triangleq y_l(nT)$$

- “+” superscript \Rightarrow *right-going*
- “-” superscript \Rightarrow *left-going*
- $y_r[(n - m)T] = y^+(n - m) =$ output of m -sample delay line with input $y^+(n)$
- $y_l[(n + m)T] \triangleq y^-(n + m) =$ input to an m -sample delay line whose output is $y^-(n)$

Lossless digital waveguide with observation points at $x = 0$
and $x = 3X = 3cT$

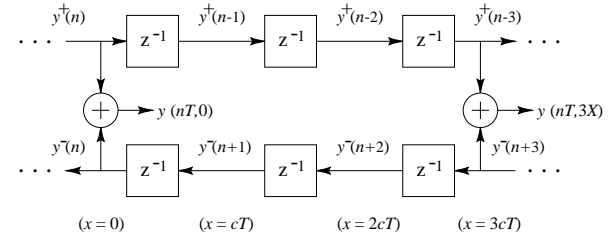

• Recall:

$$y(t, x) = y^+\left(\frac{t - x/c}{T}\right) + y^-\left(\frac{t + x/c}{T}\right)$$

\downarrow

$$y(nT, mX) = y^+(n - m) + y^-(n + m)$$

- Position $x_m = mX = mcT$ is *eliminated* from the simulation
- Position x_m remains laid out from left to right
- Left- and right-going traveling waves must be *summed* to produce a *physical* output

$$y(t_n, x_m) = y^+(n - m) + y^-(n + m)$$

- Similar to *ladder* and *lattice digital filters*

Important point: Discrete time simulation is *exact* at the sampling instants, to within the numerical precision of the samples themselves.

To avoid *aliasing* associated with sampling,

- Require all initial waveshapes be *bandlimited* to $(-f_s/2, f_s/2)$
- Require all external driving signals be similarly bandlimited
- Avoid nonlinearities or keep them “weak”
- Avoid time variation or keep it slow
- Use plenty of lowpass filtering with rapid high-frequency roll-off in severely nonlinear and/or time-varying cases
- Prefer “feed-forward” over “feed-back” around nonlinearities when possible

Relation of Sampled D’Alembert Traveling Waves to the Finite Difference Approximation

Recall FDA result [based on $\dot{x}(n) \approx x(n) - x(n-1)$]:

$$y(n+1, m) = y(n, m+1) + y(n, m-1) - y(n-1, m)$$

Traveling-wave decomposition (exact in lossless case at sampling instants):

$$y(n, m) = y^+(n-m) + y^-(n+m)$$

Substituting into FDA gives


$$\begin{aligned} y(n+1, m) &= y(n, m+1) + y(n, m-1) - y(n-1, m) \\ &= y^+(n-m-1) + y^-(n+m+1) \\ &\quad + y^+(n-m+1) + y^-(n+m-1) \\ &\quad - y^+(n-m-1) - y^-(n+m-1) \\ &= y^-(n+m+1) + y^+(n-m+1) \\ &= y^+[(n+1)-m] + y^-[(n+1)+m] \\ &\triangleq y(n+1, m) \end{aligned}$$

- FDA recursion is also *exact* in the lossless case (!)
- Recall that FDA introduced artificial damping in mass-spring systems
- The last identity above can be rewritten as

$$\begin{aligned} y(n+1, m) &\triangleq y^+[(n+1)-m] + y^-[(n+1)+m] \\ &= y^+[n-(m-1)] + y^-[n+(m+1)] \end{aligned}$$

- Displacement at time $n + 1$ and position m is the superposition of left- and right-going components from positions $m - 1$ and $m + 1$ at time n
- The physical wave variable can be computed for the next time step as the sum of incoming traveling wave components from the left and right
- Lossless nature of the computation is clear

The Lossy 1D Wave Equation

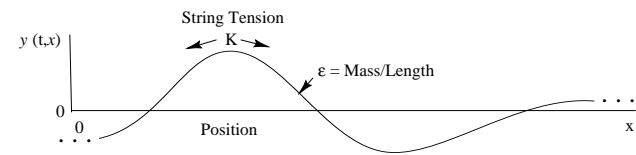

The ideal vibrating string.

Sources of loss in a vibrating string:

1. Yielding terminations
2. Drag due to air viscosity
3. Internal bending friction

Simplest case: Add a term proportional to velocity:

$$Ky'' = \epsilon \ddot{y} + \underbrace{\mu \dot{y}}_{\text{new}}$$

More generally,

$$Ky'' = \epsilon \ddot{y} + \sum_{\substack{m=0 \\ m \text{ odd}}}^{M-1} \mu_m \frac{\partial^m y(t, x)}{\partial t^m}$$

where μ_m may be determined *indirectly* by *measuring* linear damping versus frequency

Solution to Lossy 1D Wave Equation

$$y(t, x) = e^{-(\mu/2\epsilon)x/c} y_r(t - x/c) + e^{(\mu/2\epsilon)x/c} y_l(t + x/c)$$

Assumptions:

- Small displacements ($y' \ll 1$)
- Small losses ($\mu \ll \epsilon\omega$)
- $c \triangleq \sqrt{K/\epsilon} =$ as before (wave velocity in lossless case)


Components *decay exponentially* in direction of travel

Sampling with $t = nT$, $x = mX$, and $X = cT$ gives

$$y(t_n, x_m) = g^{-m} y^+(n - m) + g^m y^-(n + m)$$


where $g \triangleq e^{-\mu T/2\epsilon}$

Lossy Digital Waveguide

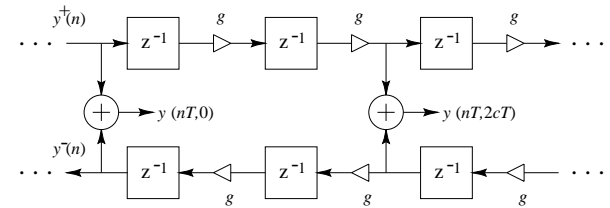

- Order ∞ distributed system reduced to finite order
- Loss factor $g = e^{-\mu T/2\epsilon}$ *summarizes* distributed loss in one sample of propagation
- Discrete-time simulation *exact* at sampling points
- Initial conditions and excitations must be *bandlimited*
- *Bandlimited interpolation* reconstructs continuous case

Loss Consolidation

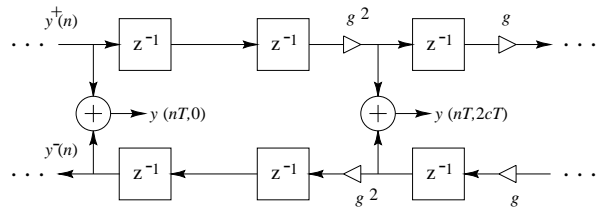


- Loss terms are simply *constant gains* $g \leq 1$
- Linear, time-invariant elements *commute*
- Applicable to *undriven* and *unobserved* string sections
- Simulation becomes *more accurate* at the outputs (fewer round-off errors)
- Number of multiplies *greatly reduced* in practice

Frequency-Dependent Losses

- Losses in nature tend to *increase* with frequency
 - Air absorption
 - Internal friction
- Simplest string wave equation giving higher damping at high frequencies

$$Ky'' = \epsilon \ddot{y} + \underbrace{\mu_1 \dot{y} + \mu_3 \frac{\partial^3 y(t, x)}{\partial t^3}}_{\text{new}}$$

- Used in Chaigne-Askenfelt piano string PDE
- Damping asymptotically proportional to ω^2
- Waves propagate with frequency-dependent attenuation (zero-phase filtering)
- Loss consolidation remains valid (by commutativity)

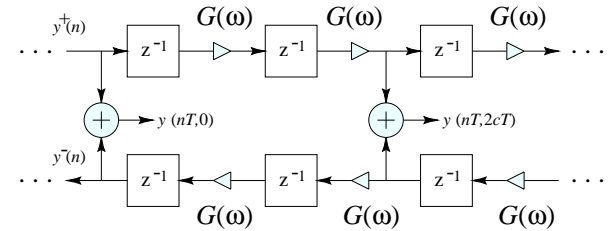

The Dispersive One-Dimensional Wave Equation

Stiffness introduces a restoring force proportional to the fourth spatial derivative:

$$\epsilon \ddot{y} = Ky'' - \underbrace{\kappa y''''}_{\text{new}}$$

where

- $\kappa = \frac{Q\pi a^4}{4}$ (moment constant)
- a = string radius
- Q = Young's modulus (stress/strain)
(spring constant for solids)
- Stiffness is a *linear* phenomenon
 - Imagine a “bundle” or “cable” of ideal string fibers
 - Stiffness is due to the *longitudinal* springiness

Limiting cases

- Reverts to *ideal flexible string* at very *low frequencies*
($Ky'' \gg \kappa y''''$)
- Becomes *ideal bar* at very *high frequencies*
($Ky'' \ll \kappa y''''$)

Effects of Stiffness

- *Phase velocity increases with frequency*

$$c(\omega) \triangleq c_0 \left(1 + \frac{\kappa \omega^2}{2Kc_0^2} \right)$$

where $c_0 = \sqrt{K/\epsilon}$ = zero-stiffness phase velocity

- Note ideal-string (LF) and ideal-bar (HF) limits
- Traveling-wave components see a frequency-dependent sound speed
- High-frequency components “run out ahead” of low-frequency components (“HF precursors”)
- Traveling waves “disperse” as they travel
(“dispersive transmission line”)
- String overtones are “stretched” and “inharmonic”
- Higher overtones are progressively sharper
($\text{Period}(\omega) = 2 \times \text{Length} / c(\omega)$)
- *Piano strings are audibly stiff*

Reference: L. Cremer: **Physics of the Violin**

Digital Simulation of Stiff Strings

- Allpass filters implement a *frequency-dependent delay*
- For stiff strings, we must generalize $X = cT$ to


$$X = c(\omega)T \Rightarrow T(\omega) = X/c(\omega) = c_0 T_0 / c(\omega)$$

where $T_0 = T(0)$ = zero-stiffness sampling interval

- Thus, replace unit delay z^{-1} by

$$z^{-1} \rightarrow z^{-c_0/c(\omega)} \triangleq H_a(z) \quad (\text{frequency-dependent delay})$$

- Each delay element becomes an *allpass filter*
- In general, $H_a(z)$ is *irrational*
- We approximate $H_a(z)$ in practice using some finite-order *fractional delay digital filter*

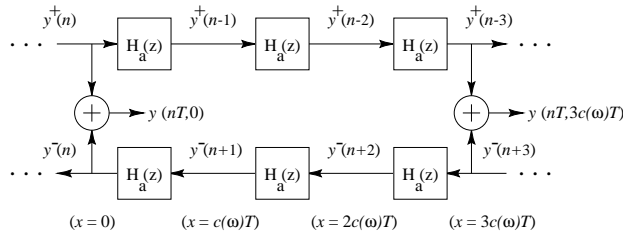

General Allpass Filters

- General, order L , allpass filter:

$$\begin{aligned} H_a(z) &\triangleq z^{-L} \frac{A(z^{-1})}{A(z)} \\ &= \frac{a_L + a_{L-1}z^{-1} + \dots + a_1z^{-(L-1)} + z^{-L}}{1 + a_1z^{-1} + a_2z^{-2} + \dots + a_Lz^{-L}} \end{aligned}$$

- General order L , monic, minimum-phase polynomial:

$$A(z) \triangleq 1 + a_1z^{-1} + a_2z^{-2} + \dots + a_Lz^{-L}$$

where $A(z_i) = 0 \Rightarrow |z_i| < 1$ (roots inside unit circle)


- Numerator polynomial = *reverse* of denominator
- First-order case:

$$H_a(z) \triangleq \frac{a_1z^{-1} + 1}{1 + a_1z^{-1}}$$

- Each pole p_i gain-compensated by a zero at $z_i = 1/p_i$
- There are papers in the literature describing methods for designing allpass filters with a prescribed *group delay* (see reader for refs)
- For piano strings L is on the order of 10

Consolidation of Dispersion

Allpass filters are *linear and time invariant* which means they *commute* with other linear and time invariant elements

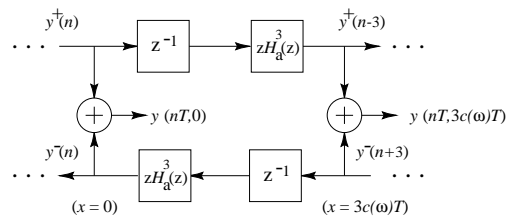

- At least one sample of pure delay must normally be “pulled out” of ideal desired allpass along each rail
- Ideal allpass design minimizes *phase-delay error* $P_c(\omega)$
- Minimizing $\|P_c(\omega) - c_0/c(\omega)\|_\infty$ approximately minimizes *tuning error* for modes of freely vibrating string (main audible effect)
- Minimizing *group delay* error optimizes *decay times*

Related Links

- Online draft of the book¹ containing this material
- Derivation of the wave equation for vibrating strings²

¹<http://ccrma.stanford.edu/~jos/waveguide/>

²<http://ccrma.stanford.edu/~jos/waveguide/String.Wave.Equation.html>